

Features

- 3.2 x 2.0 x 0.6 SMD LED
- Low power consumption
- General purpose leads
- Bulk, Available on tape and reel
- Fast response time
- High photo sensitivity
- Small junction capacitance

Applications

- High speed photo detector
- Automatic door sensor
- Security system
- Industrial equipment
- Infrared application system

Description

The IN-S32YTPD is a popular 3.2 x 2.0mm package with versatile design capabilities. It is a PCB type LED which can be used in various applications. Due to its **black** epoxy, the device is matched to visible light and infrared radiation.

Recommended Solder Pattern





Figure 1. IN-S32YTPD Solder Pattern

Package Dimensions in mm

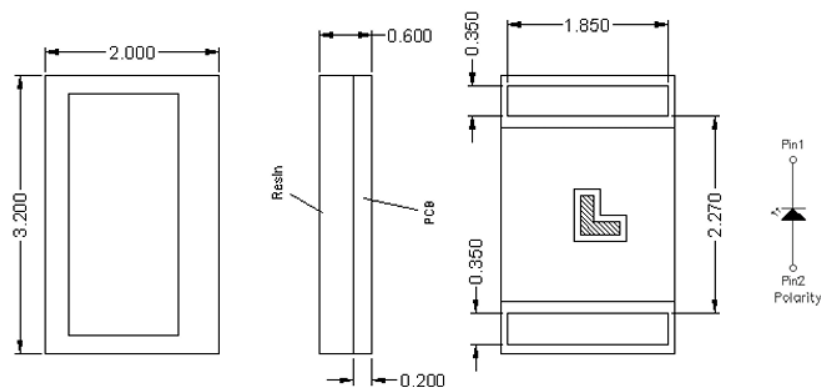

Notes:

1. All dimensions are in millimeters (inches).
2. Tolerance is ± 0.25 mm (0.010 ") unless otherwise noted.

Figure 1. IN-S32YTPD Package Dimensions

Absolute Maximum Rating at 25°C

Symbol	Parameters	Ratings	Units	Notes
V _{BR}	Reverse Breakdown Voltage	35	V	
T _{opr}	Operating Temperature	-40~+85	°C	
T _{stg}	Storage Temperature	-40~+85	°C	
T _{sol}	Soldering Temperature	260	°C	1
P _D	Total Power Dissipation	150	mW	

Notes

1. Soldering time $\leq$ 5 seconds.


Electro-Optical Characteristics

Symbol	Parameters	Test conditions	Min	Typ	Max	Units
λ_D	Rang of Spectral Bandwidth	---	400	-	1100	nm
λ_P	Wavelength of Peak Sensitivity	---	-	940		nm
V_{BR}	Reverse Breakdown Voltage	IR=100 μ A Ee=0mW/cm	35	-	-	V
I_D	Dark Current	VR=5V Ee=0mW/cm ²	-	-	10	nA
I_L	Reverse Light Current	Ee=0.1mW/cm ² λ_d =540nm, VR=5V	0.5	1.85	3	μ A
I_L	Reverse Light Current	Ee=0.1mW/cm ² λ_d =940nm, VR=5V	-	3.5	-	μ A
t_r	Rise Time	VR=10V RL=50 Ω λ_p =940nm	-	0.56	-	μ s
t_f	Fall Time		-	0.64	-	μ s

Notes:

Test circuit :

Bin Code	A5C
Min	0.5
Max	3

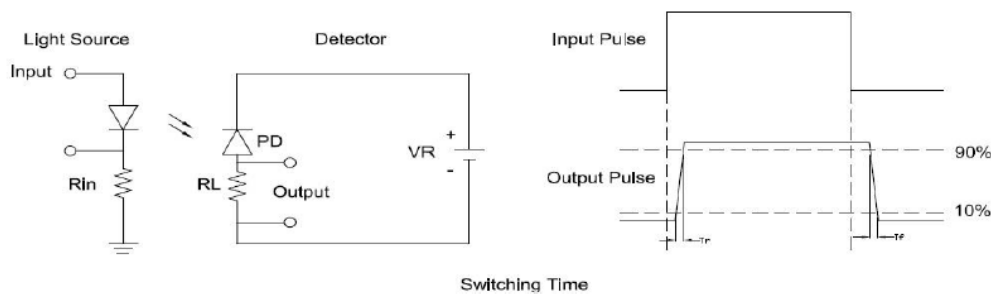

ESD Precaution



ATTENTION: Electrostatic Discharge (ESD) protection



The symbol above denotes that ESD precaution is needed. ESD protection for GaP and AlGaAs based chips is necessary even though they are relatively safe in the presence of low static-electric discharge. Parts built with AlInGaP, GaN, or/and InGaN based chips are STATIC SENSITIVE devices. ESD precaution must be taken during design and assembly. If manual work or processing is needed, please ensure the device is adequately protected from ESD during the process.

Please be advised that normal static precautions should be taken in the handling and assembly of this device to prevent damage or degradation which may be induced by electrostatic discharge (ESD).

Typical Characteristic Curves

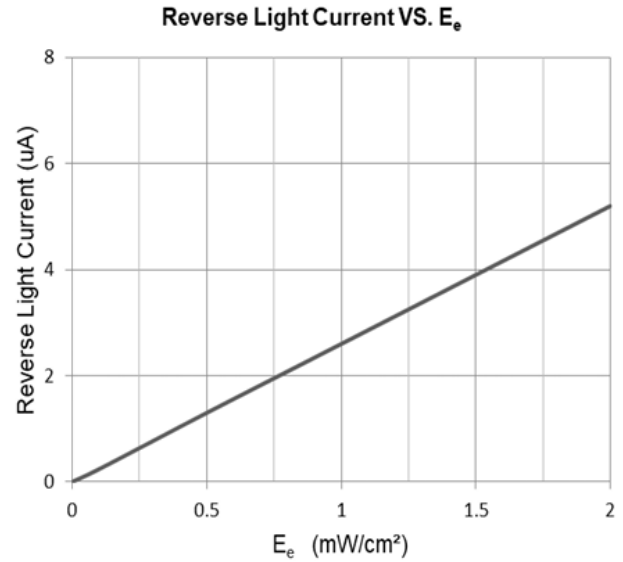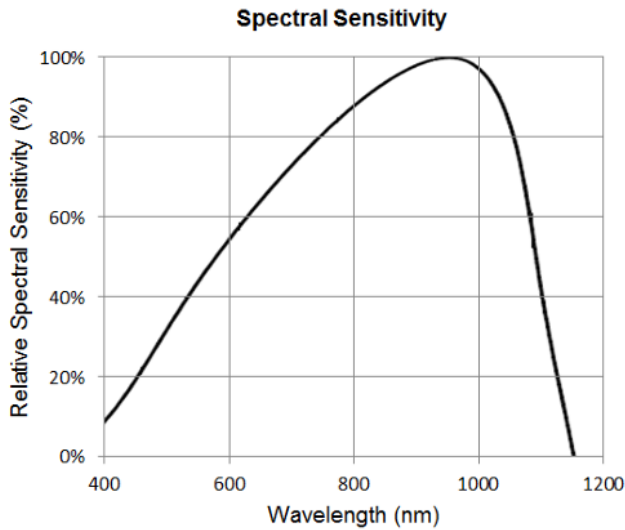

Ordering Information

Product	Symbol	Parameters	Test conditions	Min	Typ	Max	Units	Orderable Part Number
IN-S32YTPD	IL	Reverse Light Current	$E_e=0.1\text{mW/cm}^2$ $\lambda_d=540\text{nm}$, $VR=5V$	0.5	1.85	3	uA	IN-S32YTPD

Label Specifications




Date: yyyy/mm/dd
 |||| |||| |||| |||| ||||

CUSTOMER P/N:
 |||| |||| |||| |||| |||| ||||

INOLUX P/N:
 |||| |||| |||| |||| |||| ||||

QTY: PCS
 |||| |||| |||| |||| |||| ||||

LOT NO:
 |||| |||| |||| |||| |||| |||| |||| |||| ||||

QC
 |||| |||| |||| |||| |||| |||| |||| |||| ||||

IV BIN:
 |||| |||| |||| |||| |||| |||| |||| |||| ||||

COLOR BIN:
 |||| |||| |||| |||| |||| |||| |||| |||| ||||

VF:
 |||| |||| |||| |||| |||| |||| |||| |||| ||||


Inolux P/N:

I	N	-	S	3	2	Y	T		PD	-	-	-	-	-	
Inolux SMD			Material	Package		Variation	Orientation	Lens	Color		Customized Stamp-off				
			PCB - S	32Y=3.2x2.0x0.6mm			T = Top Mount	(Blank) = Clear	PD = Photo Diode						


Lot No.:

Z	2	0	1	7	01	24	001
Internal Tracker	Year (2017, 2018,)				Month	Date	Serial


Packaging Information:

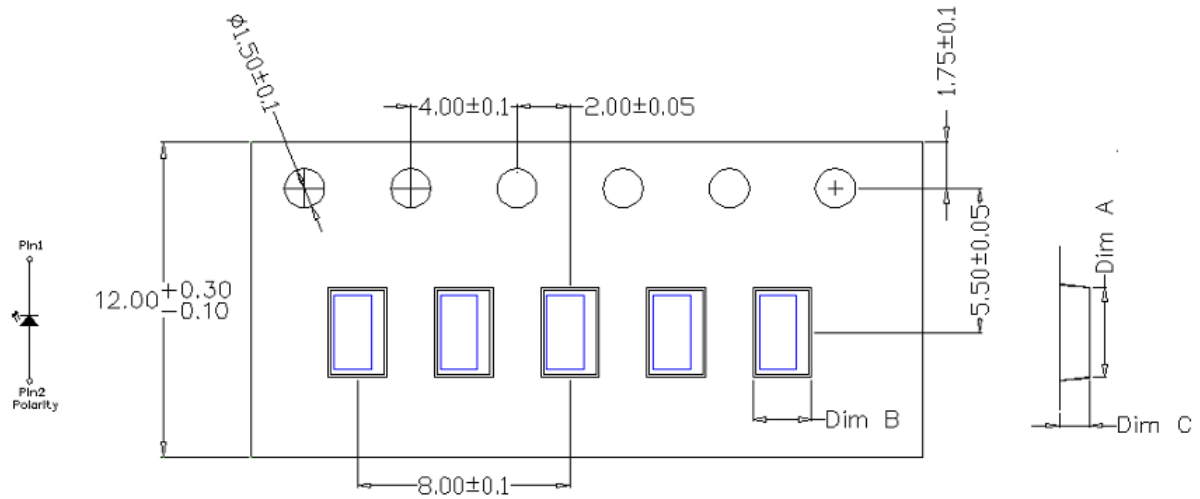

Reel Dimension

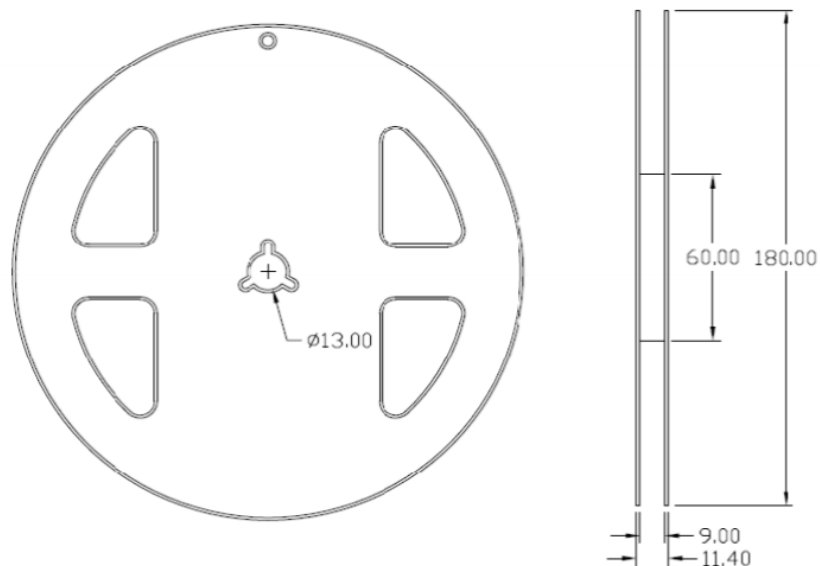

Packing Dimension

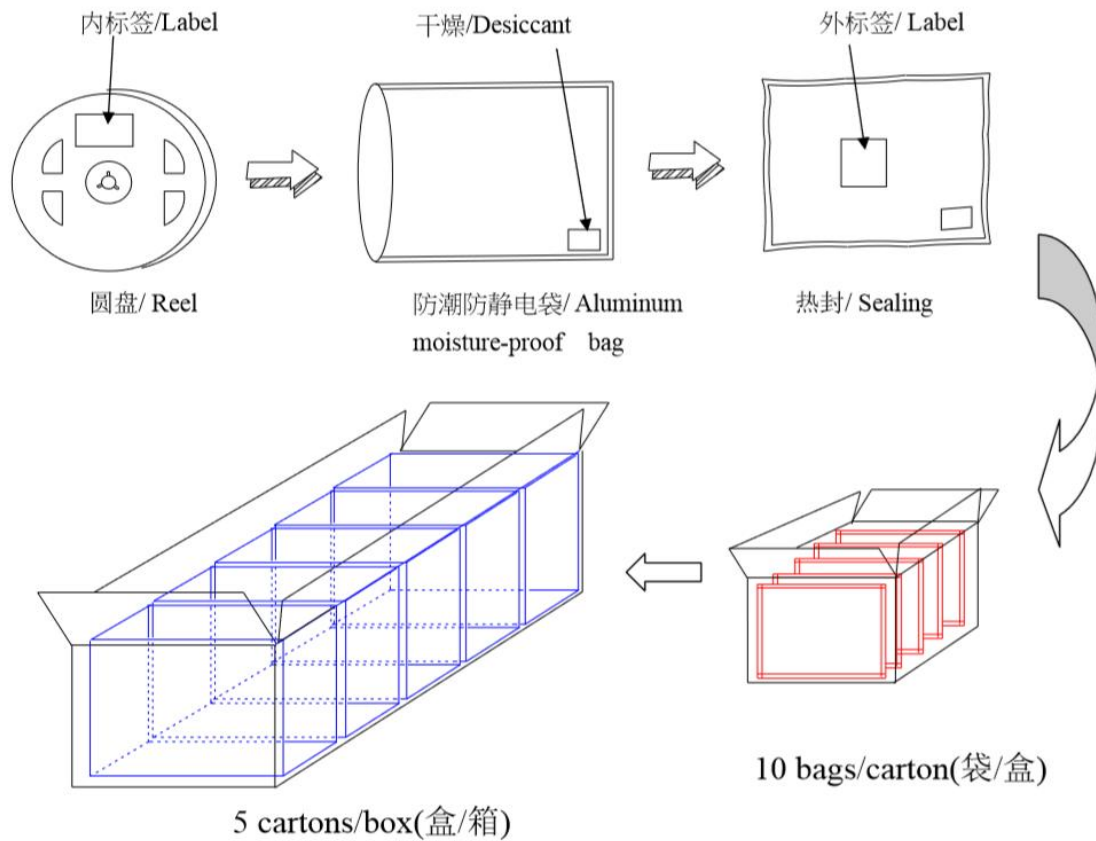

5 boxes per carton are available depending on shipment quantity.

	Specification	Material	Quantity
Carrier tape	Per EIA 481-1A specs	Conductive black tape	3000pcs per reel
Reel	Per EIA 481-1A specs	Conductive black	
Label	IN standard	Paper	
Packing bag	220x240mm	Aluminum laminated bag/ no-zipper	One reel per bag
Carton	IN standard	Paper	Non-specified

Others:


Each immediate box consists of 5 reels. The 5 reels may not necessarily have the same lot number or the same bin. Each reel has a label identifying its specification; the immediate box consists of a product label as well.

Dry Pack

All SMD optical devices are **MOISTURE SENSITIVE**. Avoid exposure to moisture at all times during transportation or storage. Every reel is packaged in a moisture protected anti-static bag. Each bag is properly sealed prior to shipment.

Upon request, a humidity indicator will be included in the moisture protected anti-static bag prior to shipment.


The packaging sequence is as follows:

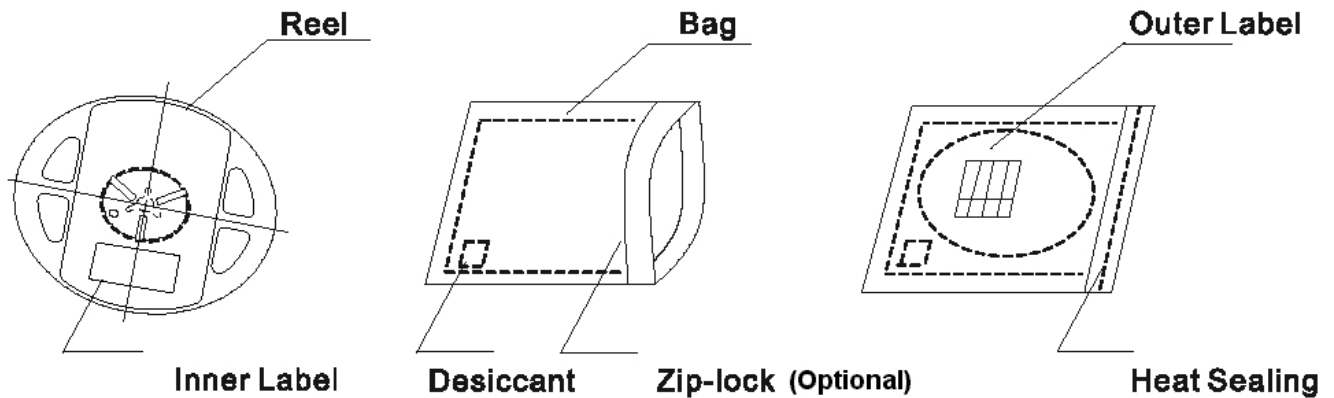

Reflow Soldering

- Recommended tin glue specifications: melting temperature in the range of 178~192 °C
- The recommended reflow soldering profile is as follows (temperatures indicated are as measured on the surface of the LED resin):

Lead-free Solder Profile

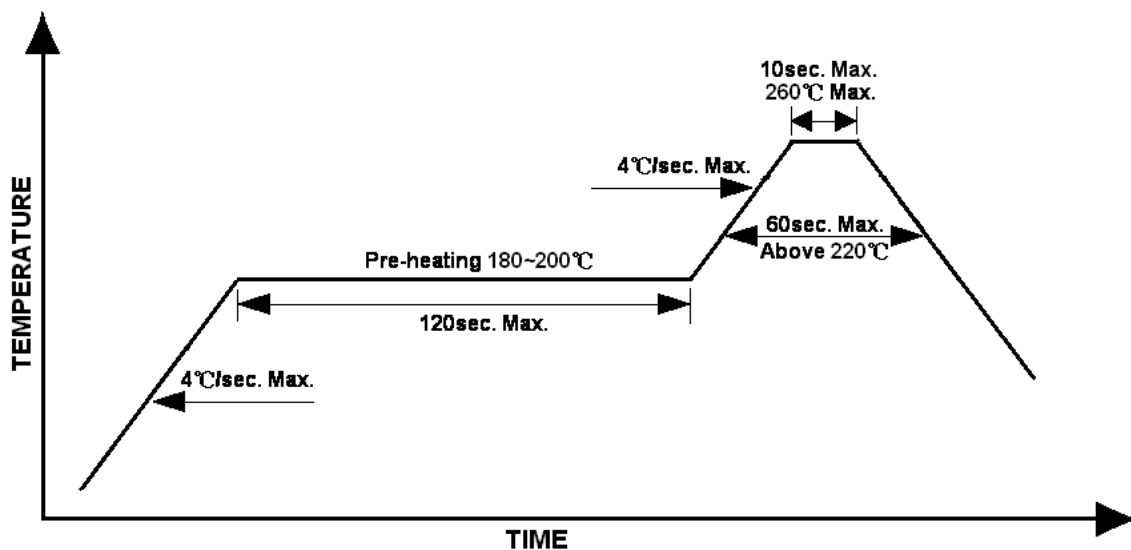

Precautions

- Avoid exposure to moisture at all times during transportation or storage.
- Anti-Static precaution must be taken when handling GaN, InGaN, and AlInGaP products.
- It is suggested to connect the unit with a current limiting resistor of the proper size. Avoid applying a reverse voltage.
- Avoid operation beyond the limits as specified by the absolute maximum ratings.
- Avoid direct contact with the surface through which the LED emits light.
- If possible, assemble the unit in a clean room or dust-free environment.

Reworking

- Rework should be completed within 5 seconds under 260 °C.
- The iron tip must not come in contact with the copper foil.
- Twin-head type is preferred.

Cleaning

Following are cleaning procedures after soldering:

- An alcohol-based solvent such as isopropyl alcohol (IPA) is recommended.
- Temperature x Time should be 50°C x 30sec. or <30°C x 3min
- Ultra sonic cleaning: < 15W/ bath; bath volume ≤ 1liter
- Curing: 100 °C max, <3min

Cautions of Pick and Place

- Avoid stress on the resin at elevated temperature.
- Avoid rubbing or scraping the resin by any object.
- Electro-static may cause damage to the component. Please ensure that the equipment is properly grounded. Use of an ionizer fan is recommended.

Revision History

Changes since last revision	Page	Version No.	Revision Date
Initial Release		1.0	06-19-2025

DISCLAIMER

INOLUX reserves the right to make changes without further notice to any products herein to improve reliability, function or design. INOLUX does not assume any liability arising out of the application or use of any product or circuit described herein; neither does it convey any license under its patent rights, nor the rights of others.

LIFE SUPPORT POLICY

INOLUX's products are not authorized for use as critical components in life support devices or systems without the express written approval of the President of INOLUX or INOLUX CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury of the user.
2. A critical component in any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.